



EN 60947-5-1

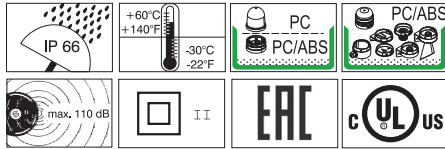

Midi

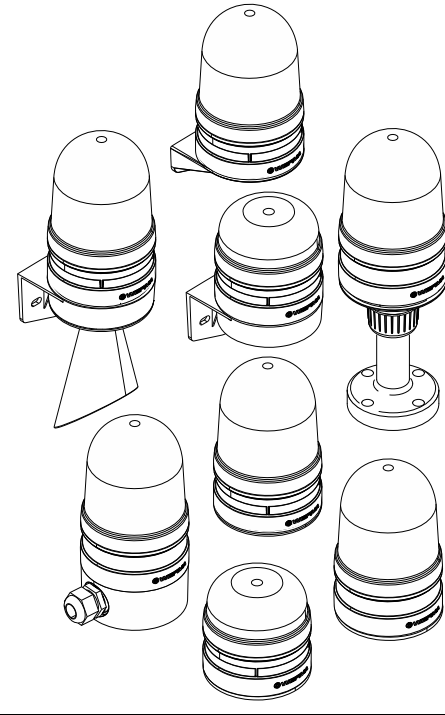

© DE



WERMA Signaltechnik GmbH + Co. KG
D-78604 Rietheim-Weilheim
Telefon +49 (0)7424 / 9557-0
Telefax +49 (0)7424 / 9557-44
info@werma.com
www.werma.com


DANGER




(DE)	Anschluss ausschließlich durch ausgebildete Elektro-Fachkräfte.
(GB)	Electrical connection is to be made by trained electrical specialists only .
(FR)	Le branchement doit uniquement être effectué par des professionnels.
(IT)	Il collegamento deve essere eseguito solo da elettricisti specializzati.
(ES)	La conexión sólo debe ser realizada por electricistas debidamente formados.
(PT)	A ligação deve ser feita exclusivamente por profissional elétrico especializado.
(NL)	De aansluiting mag enkel gebeuren door erkende vakmensen.
(CZ)	Připojení smí provádět pouze kvalifikovaný personál.
(PL)	Podłączenie wyłącznie przez specjalistów-elektryków.
(FI)	Liittäminen kuuluu ainoastaan koulutettujen sähköalan ammattilaisten tehtäviin.
(RU)	Подключение проводов только специа- листом-электриком.
(TR)	Bağlantı sadece eğitimli elektrik teknisyenleri tarafından yapılmalıdır.
(CN)	布线需由专业电工执行














161 / 461

















**DANGER
EVS**


(DE) Bei Epilepsie ungeeignet!
 (GB) Unsuitable for epilepsy sufferers.
 (FR) Ne convient pas aux personnes souffrant d'épilepsie.
 (IT) Inadatto per epilettici.
 (ES) Inadecuado para epilépticos.
 (PT) Não aconselhavel a pessoas que sofram de Epilepsia.
 (NL) Niet geschikt voor epileptici.
 (CZ) Nevhodné pro epileptiky.
 (PL) Nie stosować przy zchorzeniu padaczki.
 (FI) Ei sovello epileptikoille.
 (RU) Не подходит для страдающих эпилепсией.
 (TR) Epilepsi hastalığı olanların kullanmaması önerilir.
 (CN) 不适用于癫痫病患者

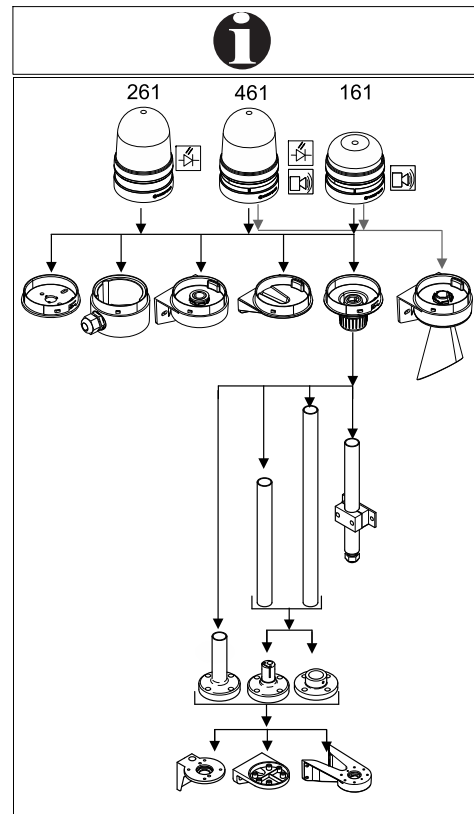













TwinLIGHT	261 x10 70 261 x10 60	12V/24V≈ 115V/60Hz - 230V/50Hz	<175 mA < 65 mA
TwinFLASH	261 x20 70 261 x20 60	12V/24V≈ 115V/60Hz - 230V/50Hz	<150 mA <100 mA
TriColour 	261 430 70 261 430 60	12V/24V≈ 115V/60Hz- 230V/50Hz	<135 mA < 50 mA
LED Rotating	261 x40 70 261 x40 60	12V/24V≈ 115V/60Hz- 230V/50Hz	<120 mA <100 mA
TwinLIGHT 	461 x10 70 461 x10 60	12V/24V≈ 115V/60Hz - 230V/50Hz	<290 mA <150 mA
TwinFLASH 	461 x20 70 461 x20 60	12V/24V≈ 115V/60Hz - 230V/50Hz	<290 mA <205 mA
	161 700 70 161 700 60	12V/24V≈ 115V/60Hz - 230V/50Hz	<135 mA <105 mA

1	1a - 261 700 01
	1b - 261 700 02
	1c - 261 700 06
	1d - 261 700 07
	1e - 261 700 03
	1f - 261 700 05

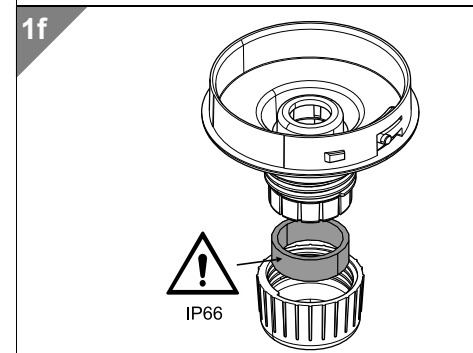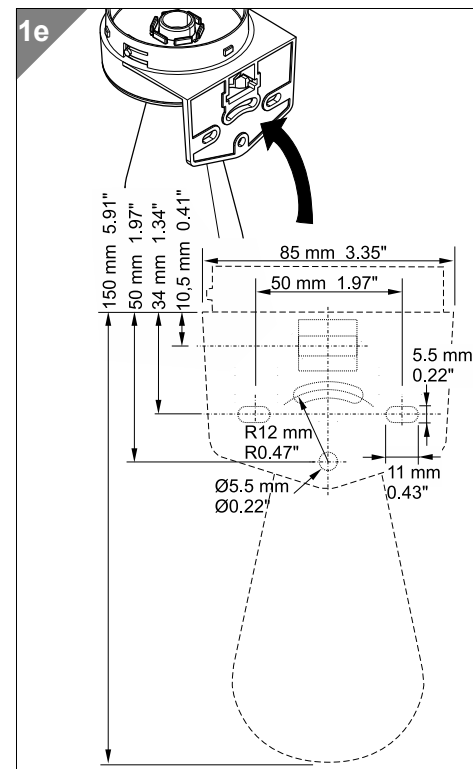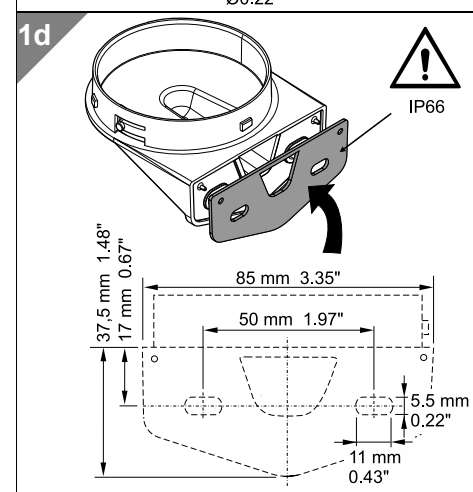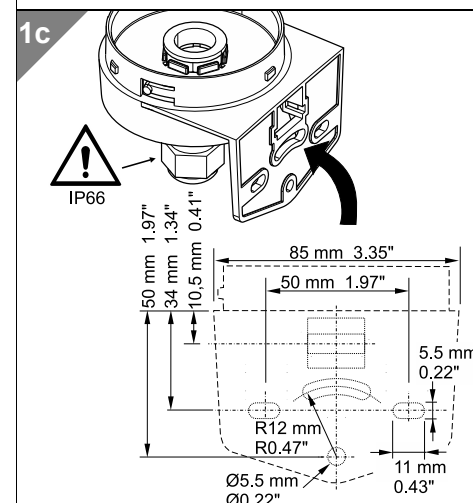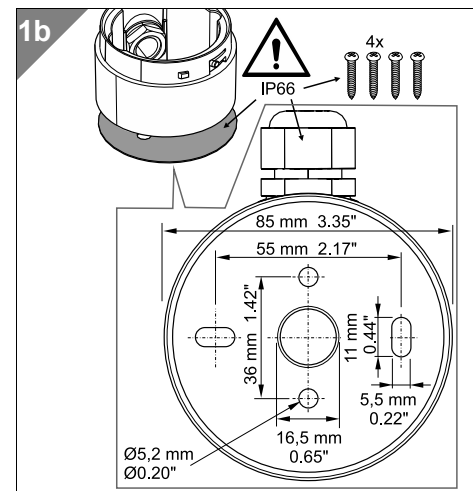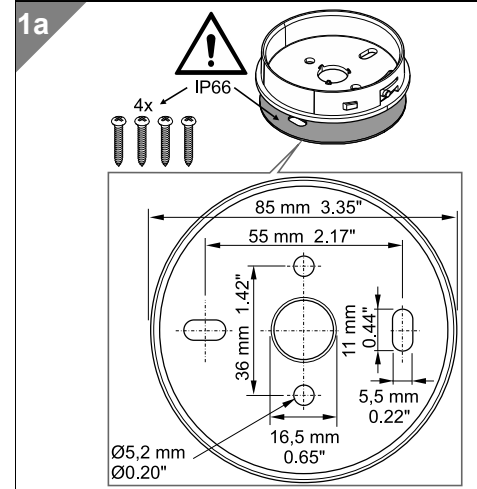


2	2a - 261 700 01, 261 700 05, 261 700 07
	2b - 261 700 02, 261 700 03
	2c - 261 700 06

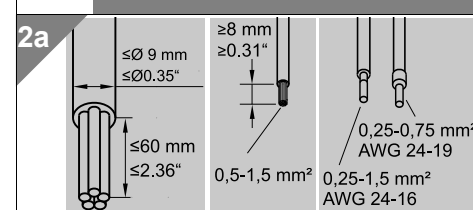

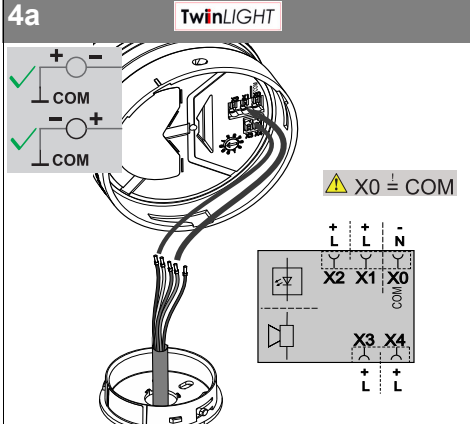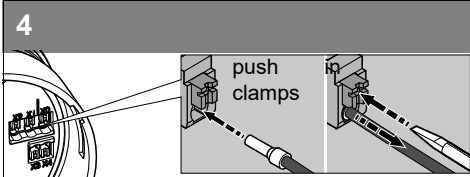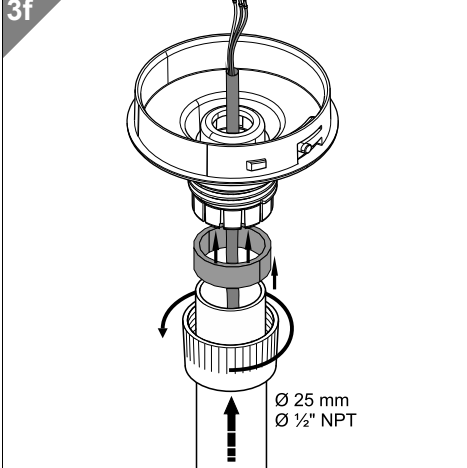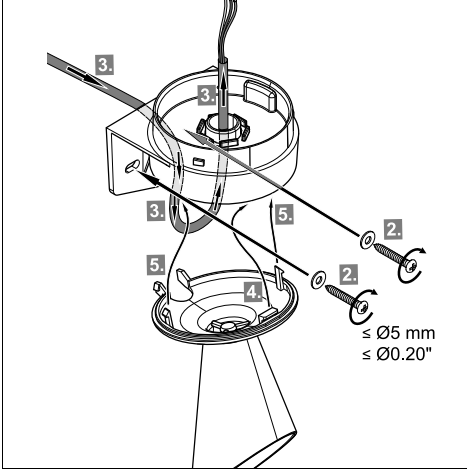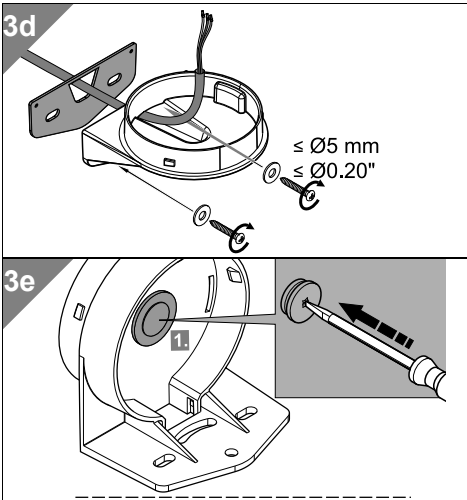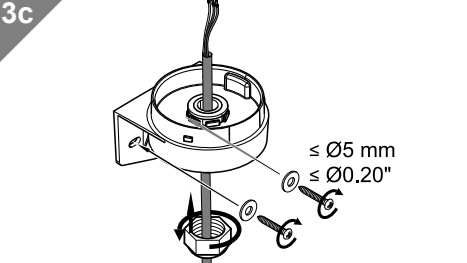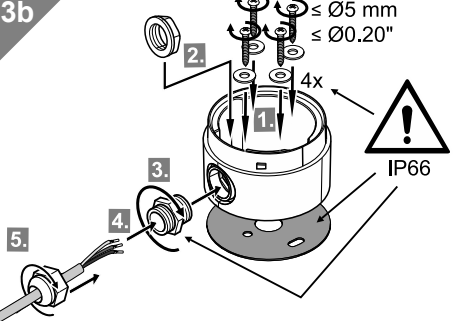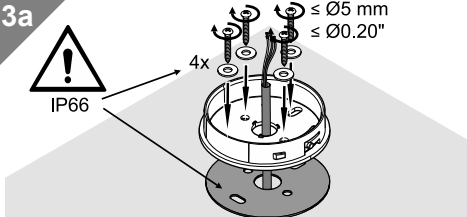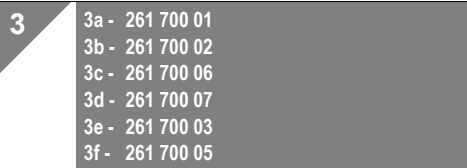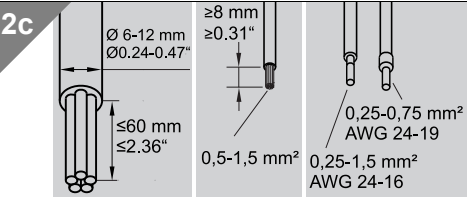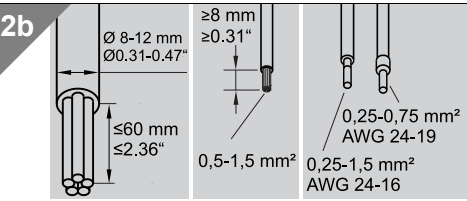


LED	X2	X1	X0 (COM)	Function
		•	•	permanent
	•		•	blinking

TONE	X3	X4	X0 (COM)	Function
	•		•	
		•	•	

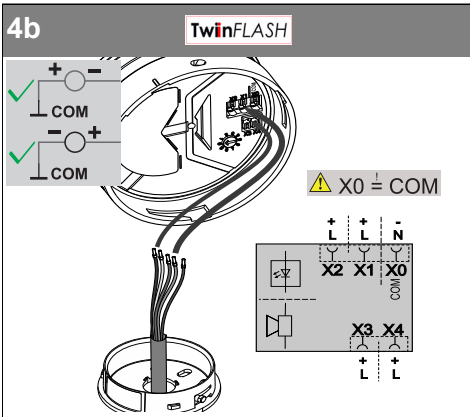


LED	X2	X1	X0 (COM)	Function
		•	•	flashing
	•		•	EVS


TONE	X3	X4	X0 (COM)	Function
	•		•	
		•	•	

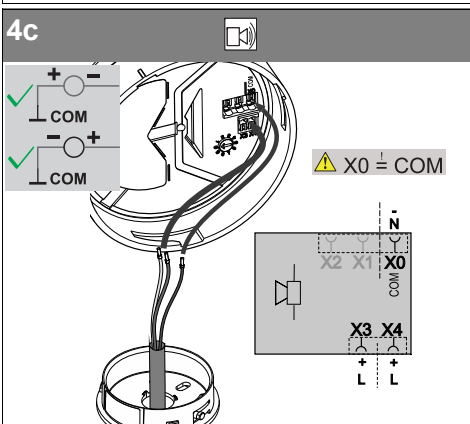

TONE	X3	X4	X0 (COM)	Function
	•		•	
		•	•	

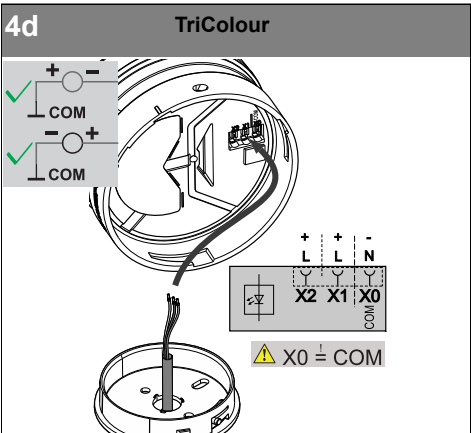

LED	X2	X1	X0 (COM)	Function
		•	•	GN
	•		•	RD
	•	•	•	YE

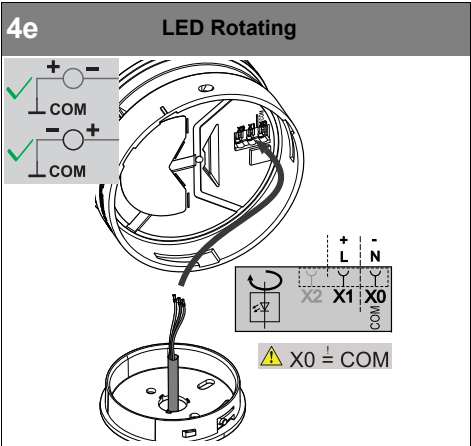

LED	X2	X1	X0 (COM)	Function
		•	•	rotating

5

NOTICE

dB = dB A (SPL) 1m

Tone		[dB]	[dB]
0	110 Hz	107	99
1	3.3 kHz	106	101
2	1Hz	110	101
3	20Hz	110	101
4	1Hz	95	94
5	7Hz	99	92
6	1Hz	101	93
7	1Hz	100	92
8	0.5 Hz	110	101
9	700 Hz	97	92

