

KombiSIGN 71 / LED Permanent Beacon 644
LED Perm. light element 24VAC/DC RD



Part No.:	644.100.75
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Red
Protection category	IP65
Service life optical	50,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	73 g
Product weight	58 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	35 mA
Rated inrush current	100 mA
Protection class	Protection class 2
Pollution degree	3


OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Permanent



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Permanent Beacon 644
LED Perm. light element 24VAC/DC RD

DRAWING

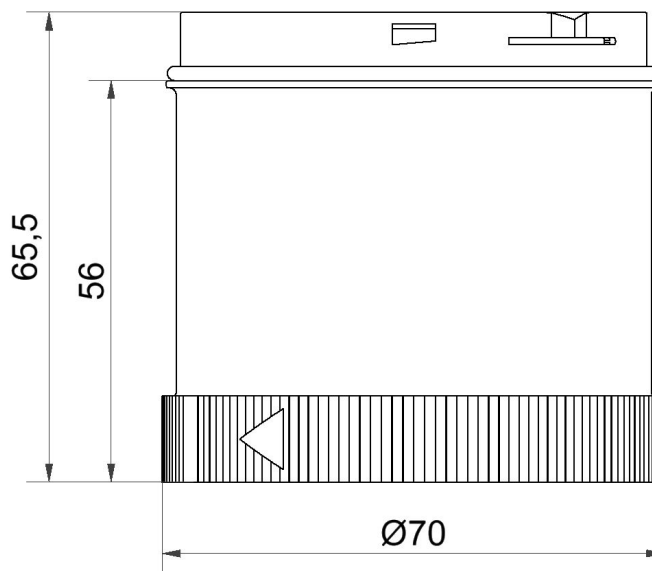

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.