

Completely pre-assembled Signal Towers / deSIGN 42  
**Signal tower deSIGN42 EM 24VDC YE/RD**



<b>Part No.:</b>	<b>694.020.55</b>
<b>Series:</b>	<b>deSIGN 42</b>



MECHANICAL DATA	
Height	206 mm
Diameter	42 mm
Materials	PC Stainless steel
Dome colour	Clear
Housing colour	Silver
Protection category	IP65
Connection	Cable
Cable length	2000 mm
Type of fixing	Built-in mounting
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	786 g
Product weight	706 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	50 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3 In the connection area: 2

OPTICAL DATA	
Light source	LED
Light colour	Red Yellow
Optical signal image	Permanent




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / deSIGN 42

**Signal tower deSIGN42 EM 24VDC YE/RD**

**DRAWING**

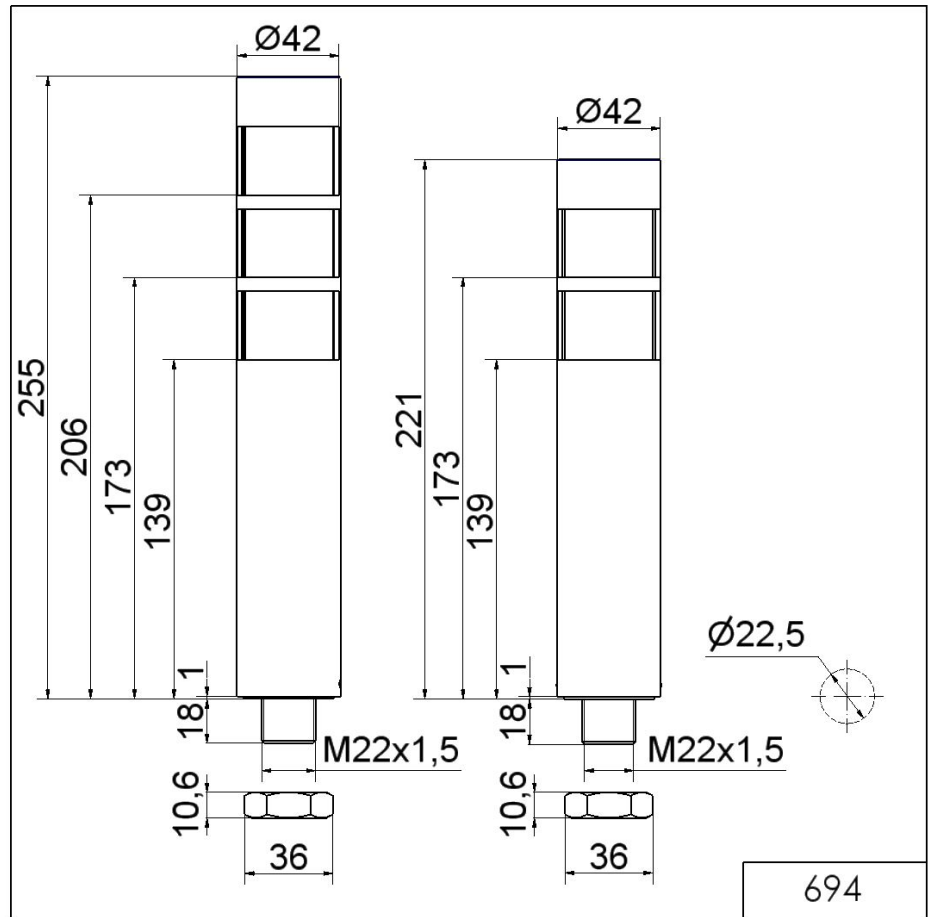

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.