

# Mini free-standing Beacons / Permanent Light 223

## Permanent Beacon WM 12-230VAC/DC GN



Part No.: 223.200.00



### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 105 mm                      |
| Diameter                     | 75 mm                       |
| Materials                    | PA-GF<br>PC<br>PC/ABS       |
| Dome colour                  | Green                       |
| Housing colour               | Black                       |
| Protection category          | IP65                        |
| Connection                   | Spring-type terminal        |
| cross-sectional area maximum | 2,50mm <sup>2</sup> / 14AWG |
| Cable entry                  | Screwed cable gland         |
| Cable entry minimum          | d = 3 mm                    |
| Cable entry maximum          | d = 6 mm                    |
| Tension relief               | Present (conforms to VDI)   |
| Type of fixing               | Wall mounting               |
| Service life optical         | depends on bulb             |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +50°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 104 g                       |
| Product weight               | 104 g                       |

### ELECTRICAL DATA

|                        |                          |
|------------------------|--------------------------|
| Operating voltage      | 12-230V                  |
| Operating voltage type | AC/DC                    |
| Protection class       | Protection class 2       |
| Pollution degree       | 3                        |
| Overvoltage category   | II                       |
| Isolation voltage      | Ui = 250V; Uimp = 2.500V |

### OPTICAL DATA

|              |       |
|--------------|-------|
| Light colour | Green |
|--------------|-------|




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Mini free-standing Beacons / Permanent Light 223

## Permanent Beacon WM 12-230VAC/DC GN

## DRAWING

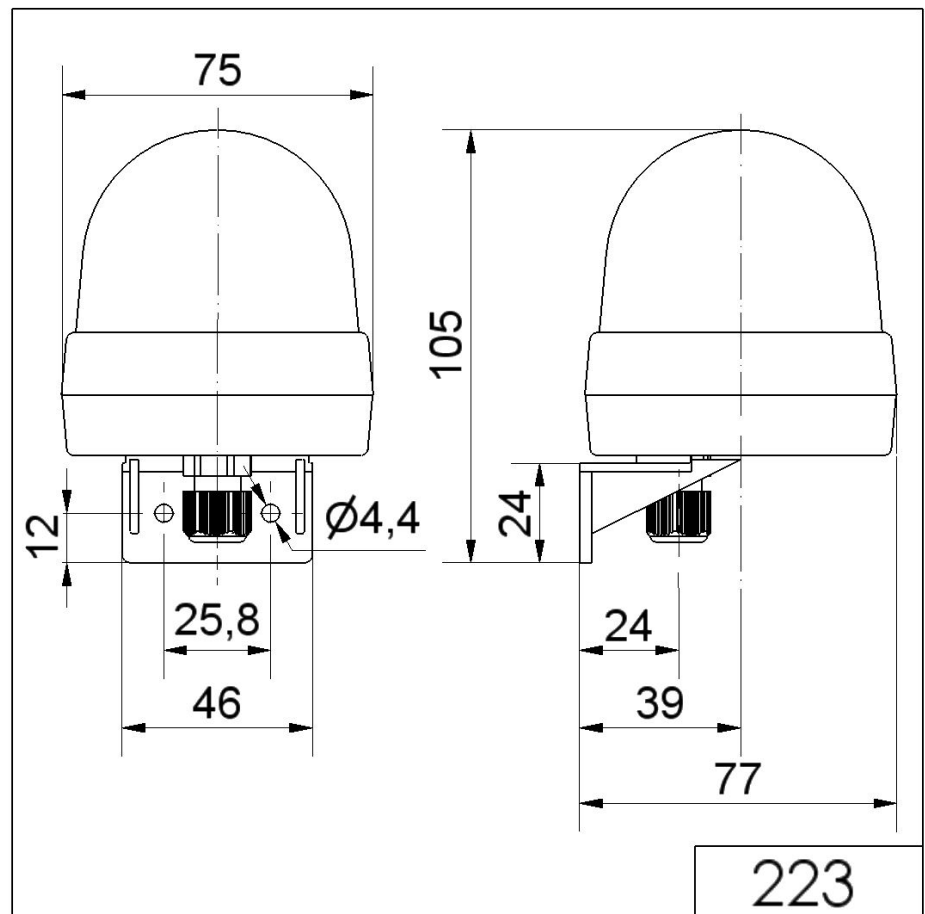

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.