

Midi free-standing Beacons / Rotating Mirror Light 880

Rotating Mirror Beacon BM 24VDC RD


Part No.: 880.152.55


MECHANICAL DATA

Height	215 mm
Diameter	152 mm
Materials	ABS PMMA
Dome colour	Red
Housing colour	Black
Protection category	IP54
Connection	Screw terminals
cross-sectional area maximum	1,50mm ² / 16AWG
Cable entry	Through hole
Cable entry maximum	d = 8 mm
Type of fixing	Base mounting
Service life optical	2,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	1102 g
Product weight	990 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	3000 mA
Rated inrush current	10.000 mA
Protection class	Protection class 2
Pollution degree	3

OPTICAL DATA

Light source	halogen bulb
Light colour	Red
Rotation frequency (rpm)	170 U/min




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / Rotating Mirror Light 880

Rotating Mirror Beacon BM 24VDC RD

DRAWING

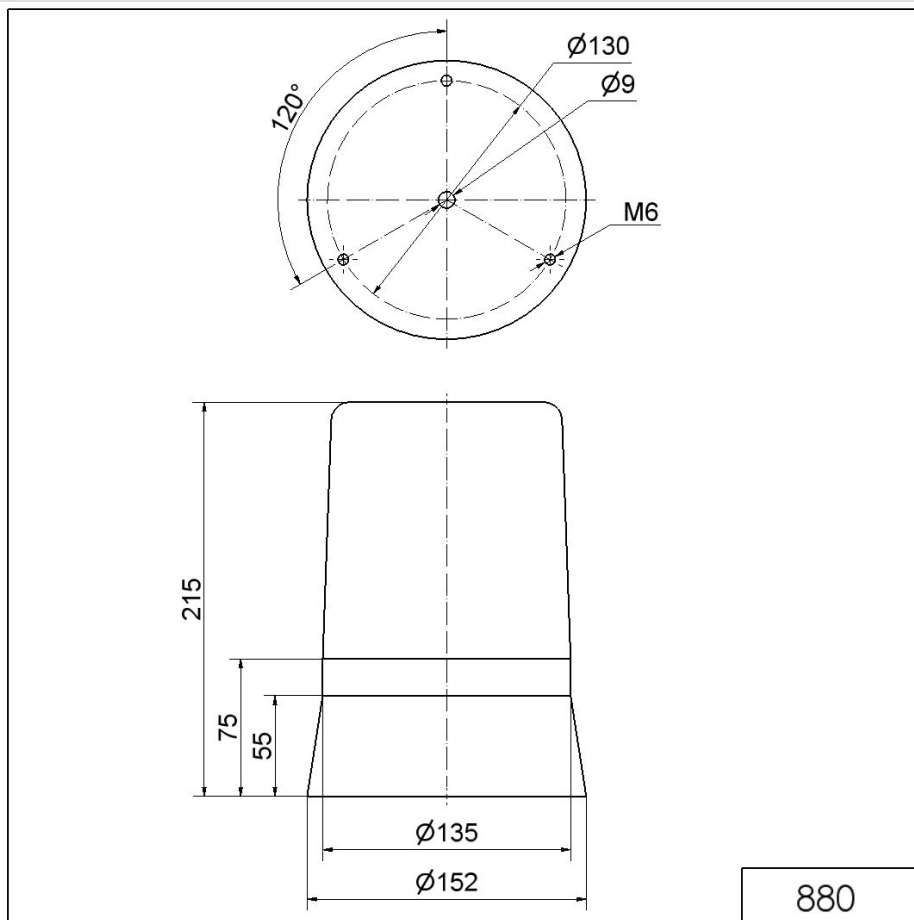

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.