

Midi free-standing Beacons / Rotating Mirror Light 880  
**Rotating Mirror Beacon BM 230VAC YE**



Part No.: 880.352.68



#### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 215 mm                      |
| Diameter                     | 152 mm                      |
| Materials                    | ABS<br>PMMA                 |
| Dome colour                  | Yellow                      |
| Housing colour               | Black                       |
| Protection category          | IP54                        |
| Connection                   | Screw terminals             |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Through hole                |
| Cable entry maximum          | d = 8 mm                    |
| Type of fixing               | Base mounting               |
| Service life optical         | 2,000 h minimum             |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 1818 g                      |
| Product weight               | 1688 g                      |

#### ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 230V                     |
| Operating voltage type      | AC                       |
| Operating voltage type      | 50Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 230 VAC                  |
| Rated operational current   | 300 mA                   |
| Rated inrush current        | 20.000 mA                |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

#### OPTICAL DATA

|                          |              |
|--------------------------|--------------|
| Light source             | halogen bulb |
| Light colour             | Yellow       |
| Rotation frequency (rpm) | 170 U/min    |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi free-standing Beacons / Rotating Mirror Light 880

**Rotating Mirror Beacon BM 230VAC YE**

**DRAWING**

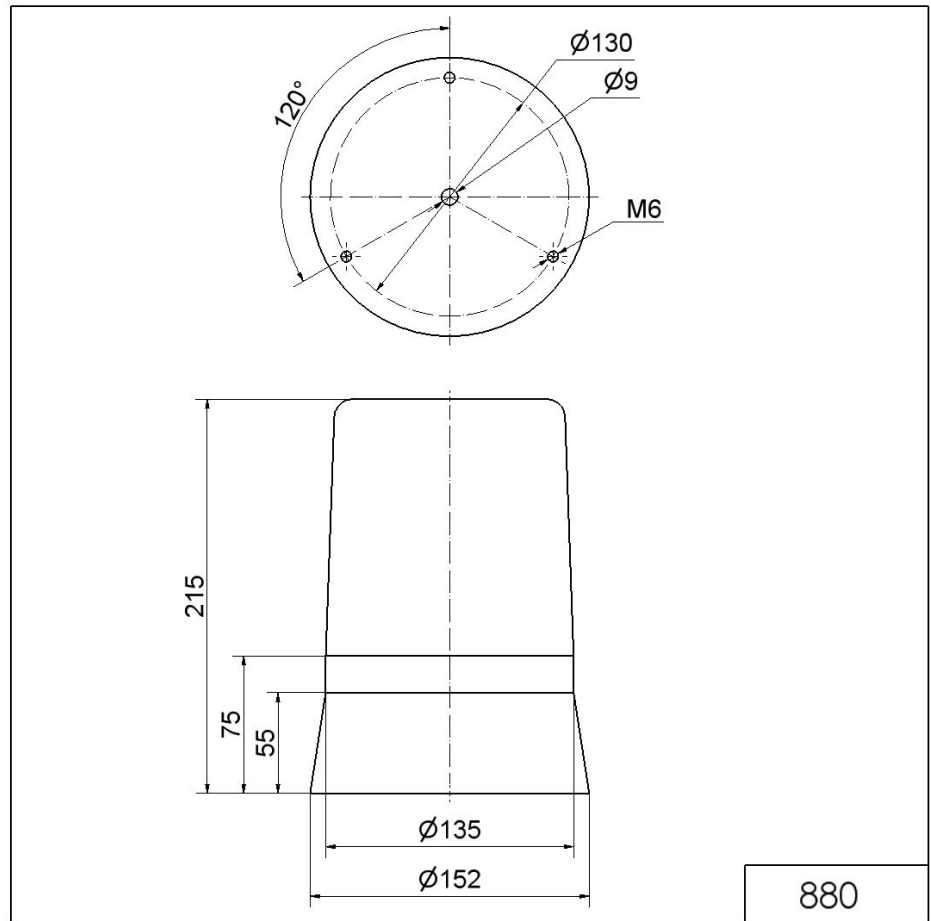

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.