

KombiSIGN 70 / Flash Beacon 842

Flashing light element 230VAC BU

| | |
|-----------|--------------|
| Part No.: | 842.500.68 |
| Series: | KombiSIGN 70 |

**MECHANICAL DATA**

| | |
|-----------------------------|---------------------------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Blue |
| Protection category | IP54 |
| Service life optical | 4 million flashes minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 95 g |
| Product weight | 80 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------------|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage type | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 15 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

OPTICAL DATA

| | |
|----------------------|-------|
| Light source | Xenon |
| Light colour | Blue |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |
| Flash output | 2 J |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Flash Beacon 842

Flashing light element 230VAC BU

DRAWING

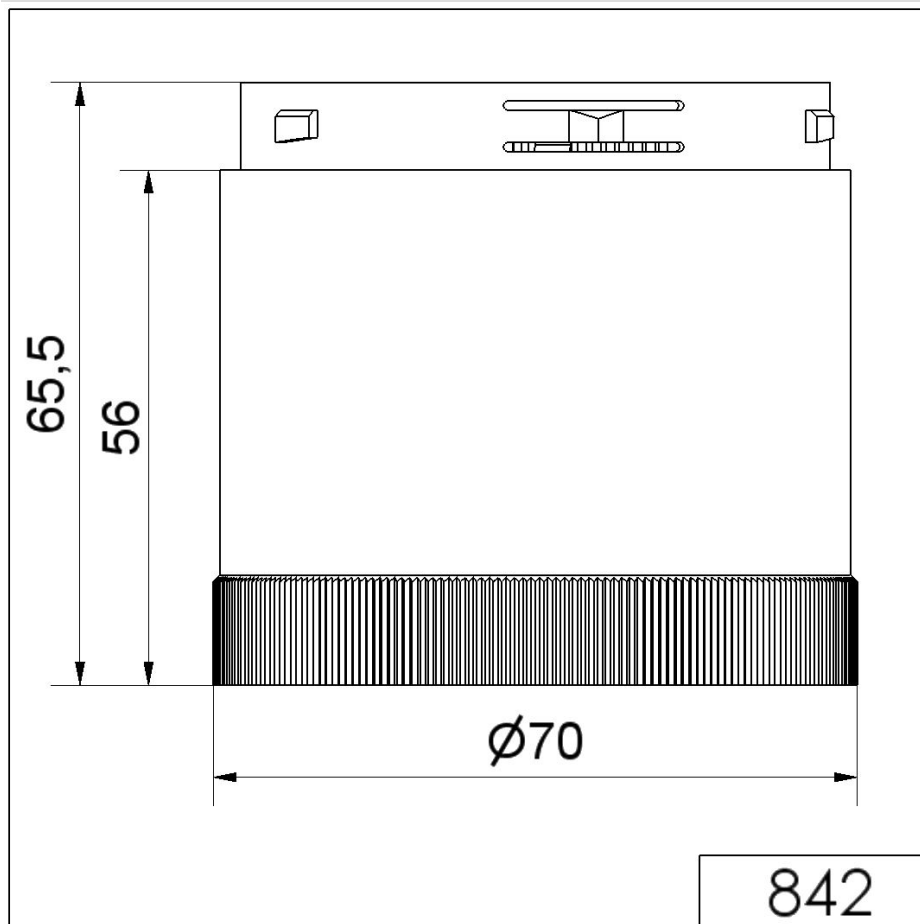

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.