

KombiSIGN 50 / LED Blinking Beacon 848  
**LED Blinking light element 24VAC/DC RD**



Part No.:	848.110.75
Series:	KombiSIGN 50



MECHANICAL DATA	
Height	67 mm
Diameter	52 mm
Materials	PC
Dome colour	Red
Protection category	IP54
Service life optical	100,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	53.3 g
Product weight	42.7 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	30 mA
Rated inrush current	150 mA
Protection class	Protection class 2
Pollution degree	3


OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Blink
Blink frequency (Hz)	1 Hz

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Blinking Beacon 848

**LED Blinking light element 24VAC/DC RD**

## DRAWING

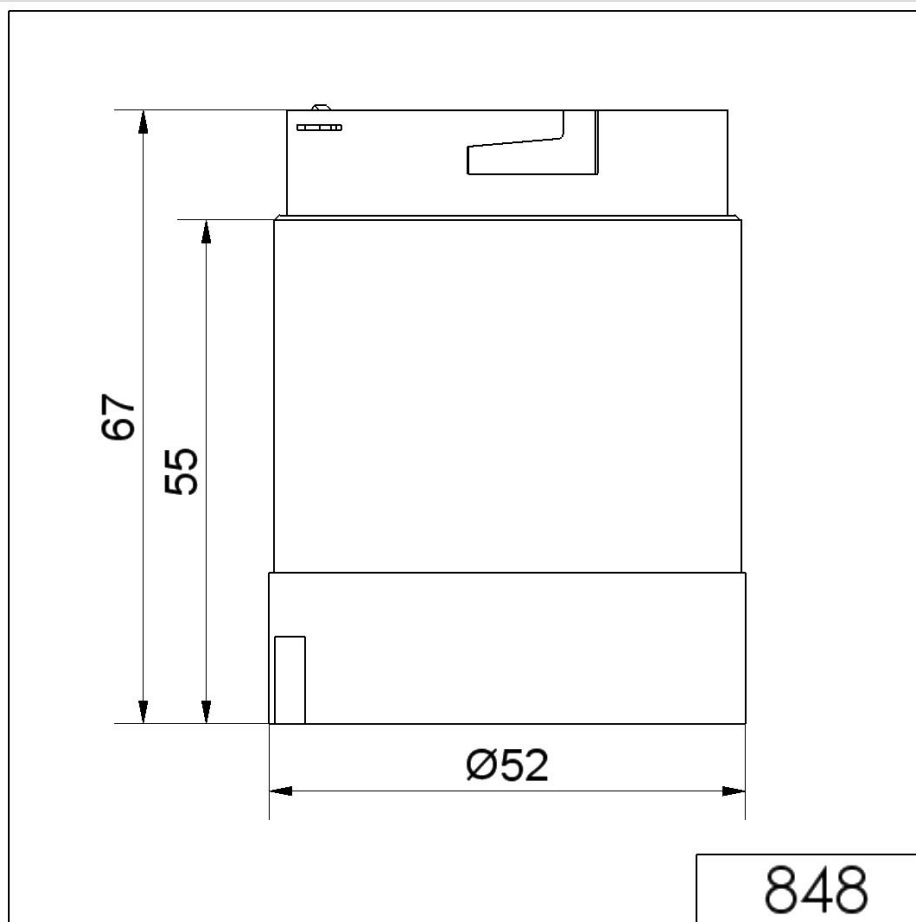

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.