

KombiSIGN 50 / LED Blinking Beacon 848
LED Blinking light element 230VAC YE



Part No.:	848.310.68
Series:	KombiSIGN 50



MECHANICAL DATA	
Height	67 mm
Diameter	55 mm
Materials	PC
Dome colour	Yellow
Protection category	IP54
Service life optical	100,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	52 g
Product weight	41 g

ELECTRICAL DATA	
Operating voltage	230V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	35 mA
Rated inrush current	2.000 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA	
Light source	LED
Light colour	Yellow
Optical signal image	Blink
Blink frequency (Hz)	1 Hz




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Blinking Beacon 848

LED Blinking light element 230VAC YE

DRAWING

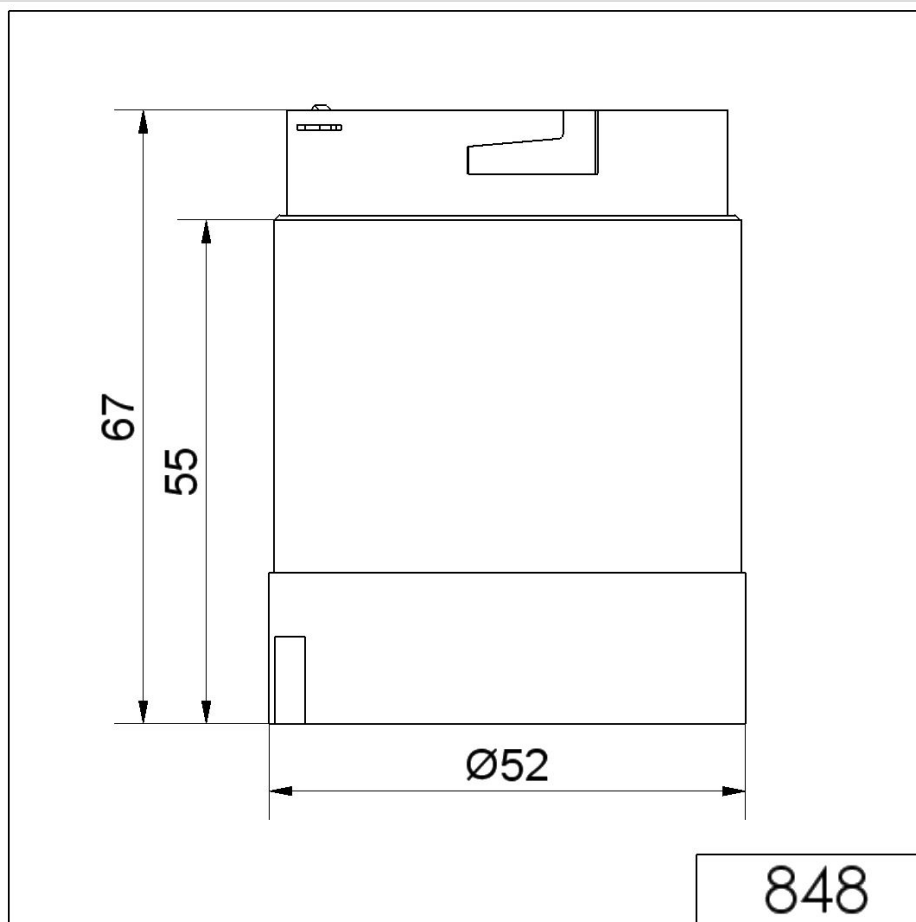

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.