

KombiSIGN 50 / LED Blinking Beacon 848

## LED Blinking light element 230VAC CL



|           |              |
|-----------|--------------|
| Part No.: | 848.410.68   |
| Series:   | KombiSIGN 50 |



### MECHANICAL DATA

|                             |                   |
|-----------------------------|-------------------|
| Height                      | 67 mm             |
| Diameter                    | 55 mm             |
| Materials                   | PC                |
| Dome colour                 | Clear             |
| Protection category         | IP54              |
| Service life optical        | 100,000 h maximum |
| Working temperature minimum | -20°C             |
| Working temperature maximum | +50°C             |
| UL Type Rating              | Type 12           |
| Weight with packaging       | 52 g              |
| Product weight              | 41 g              |

### ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 230V                     |
| Operating voltage type      | AC                       |
| Operating voltage type      | 50Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 230 VAC                  |
| Rated operational current   | 35 mA                    |
| Rated inrush current        | 2.000 mA                 |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

### OPTICAL DATA

|                      |       |
|----------------------|-------|
| Light source         | LED   |
| Light colour         | White |
| Optical signal image | Blink |
| Blink frequency (Hz) | 1 Hz  |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Blinking Beacon 848

**LED Blinking light element 230VAC CL**

**DRAWING**

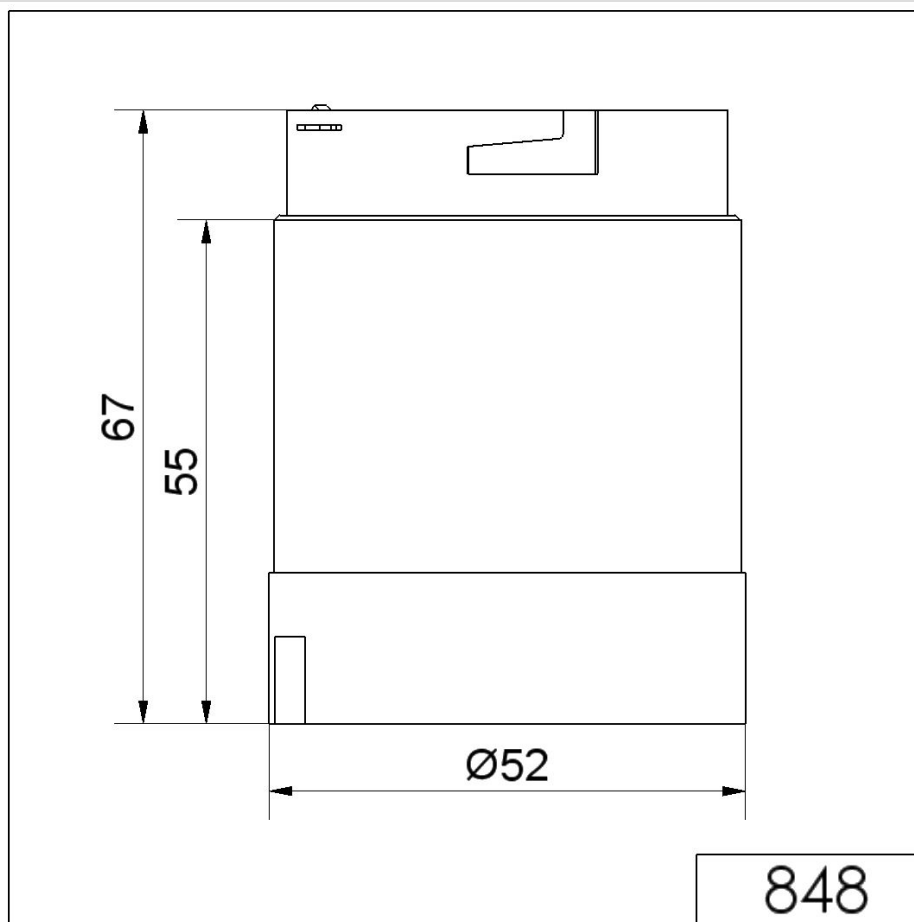

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.