

KombiSIGN 50 / LED Flashing Element 848

LED Flashing light el. 24VDC CL



Part No.:	848.420.55
Series:	KombiSIGN 50



MECHANICAL DATA

Height	67 mm
Diameter	52 mm
Materials	PC
Dome colour	Clear
Protection category	IP54
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	66 g
Product weight	55 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3

OPTICAL DATA

Light source	LED
Light colour	White
Optical signal image	Flash
Flash frequency	1 Hz




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Flashing Element 848

LED Flashing light el. 24VDC CL

DRAWING

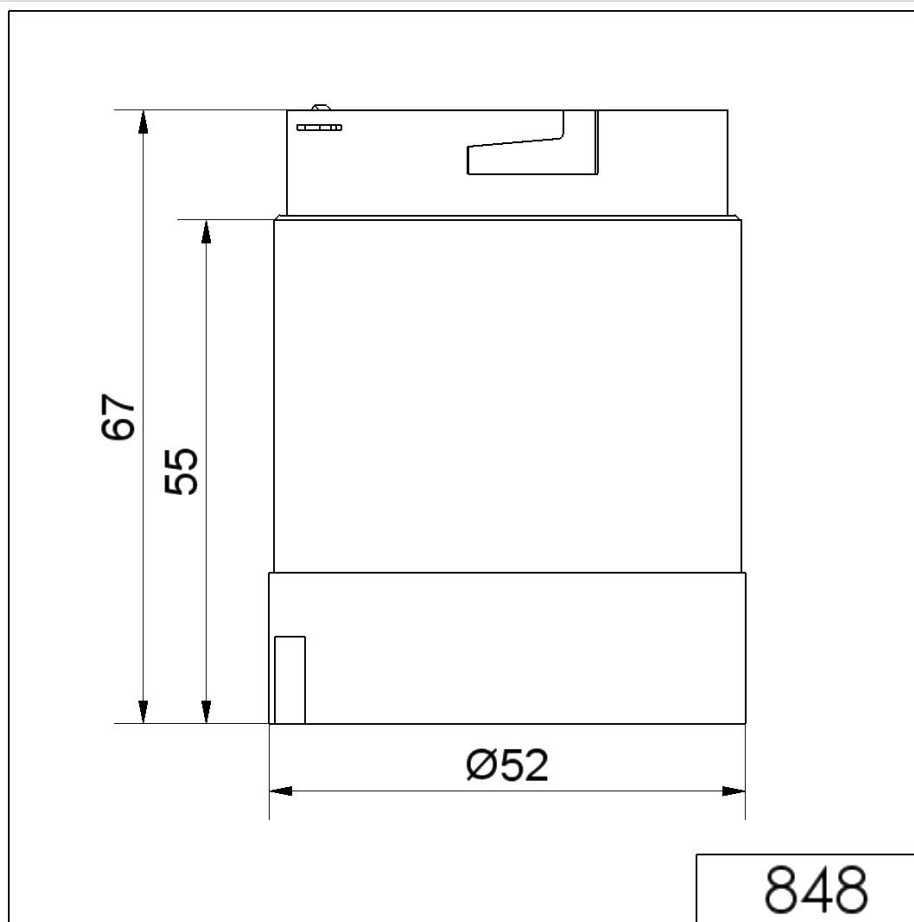

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.