

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

**Electr. Buzzer EM Contin. tone 12VDC GY**

Part No.: 118.068.14




MECHANICAL DATA	
Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	0°C
Working temperature maximum	+60°C
Weight with packaging	29 g
Product weight	29 g
ELECTRICAL DATA	
Operating voltage	12V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	20 mA
Rated inrush current	<500mA
Protection class	Protection class 2
Pollution degree	2
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	90,0 dB dB(A)
Acoustic signal image	Continuous tone
Audio frequency	2400 Hz



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119  
**Electr. Buzzer EM Contin. tone 12VDC GY**

DRAWING

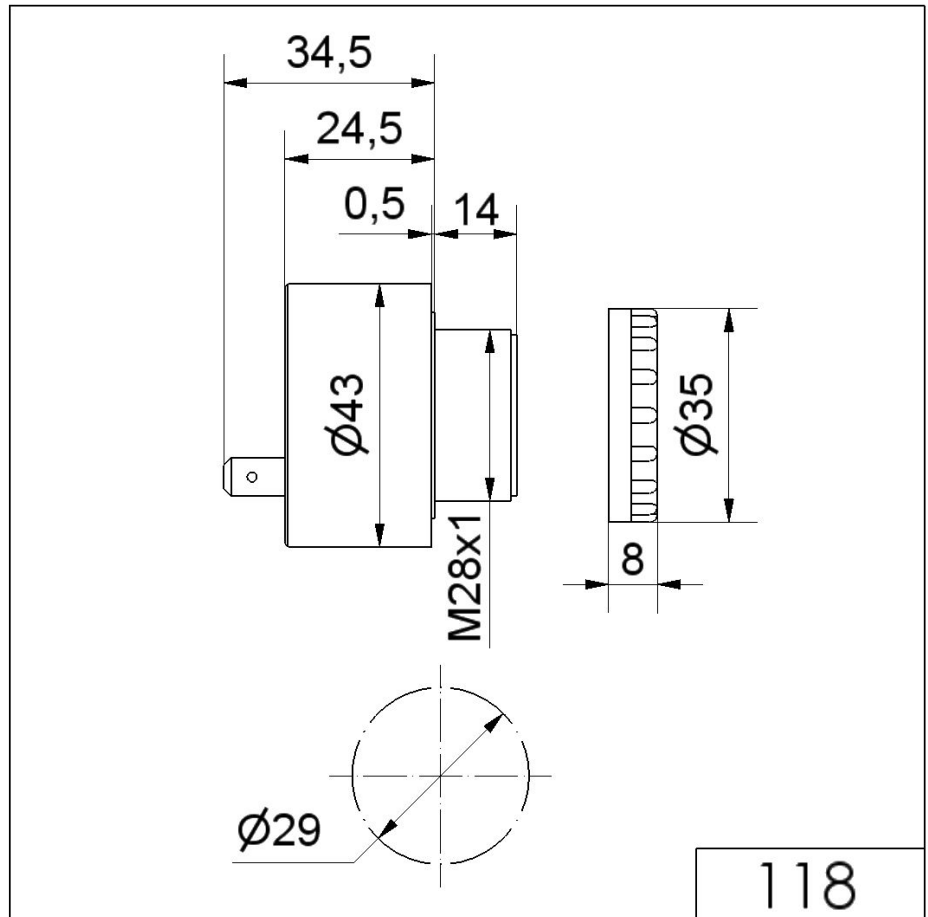

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.