

Horns and Sirens / Alarm bell

**Bells continuous tone 230VAC GY**

Part No.: 914.052.68

**MECHANICAL DATA**

Height	76 mm
Diameter	167 mm
Materials	Steel
Housing colour	Grey
Protection category	IP66
Connection	Screw terminals
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Cable entry	Screwed cable gland
Cable entry minimum	d = 5 mm
Cable entry maximum	d = 9 mm
Tension relief	Present (conforms to VDI)
Type of fixing	Wall mounting
Service life optical	200 h minimum
Acoustic service life	200 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	1510 g
Product weight	1395 g

**ELECTRICAL DATA**

Operating voltage	230V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	55 mA
Rated inrush current	3.000 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

**ACUSTICAL DATA**

Volume/dB(max) at 1m distance	100,0 dB dB(A)
Acoustic signal image	Continuous tone




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Horns and Sirens / Alarm bell

**Bells continuous tone 230VAC GY**

**DRAWING**

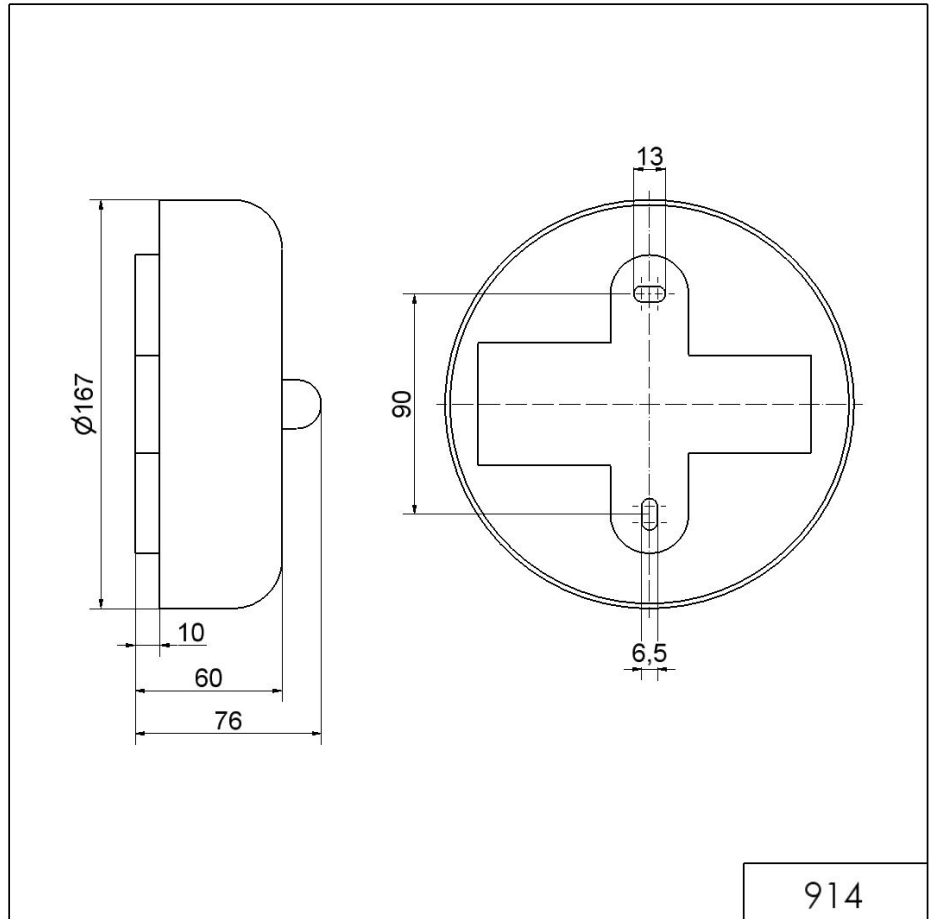

914



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.