

Mini / LED/Buzzer 422

# LED Buzzer WM Contin/pulse 115VAC YE



Part No.: 422.310.67



## MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 121 mm                      |
| Diameter                     | 83 mm                       |
| Materials                    | PC                          |
| Dome colour                  | Yellow                      |
| Housing colour               | Grey                        |
| Protection category          | IP65                        |
| Connection                   | Screw terminals             |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Membrane grommet            |
| Cable entry minimum          | d = 1 mm                    |
| Cable entry maximum          | d = 9 mm                    |
| Tension relief               | Pull-out protection         |
| Type of fixing               | Wall mounting               |
| Service life optical         | 50,000 h maximum            |
| Acoustic service life        | 5,000 h minimum             |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 169 g                       |
| Product weight               | 129 g                       |

## ELECTRICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 115V                     |
| Operating voltage type      | AC                       |
| Operating voltage type      | 60Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 115 VAC                  |
| Rated operational current   | 25 mA                    |
| Rated inrush current        | 500 mA                   |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

## OPTICAL DATA

|                      |           |
|----------------------|-----------|
| Light source         | LED       |
| Light colour         | Yellow    |
| Optical signal image | Permanent |

## ACUSTICAL DATA




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini / LED/Buzzer 422

# LED Buzzer WM Contin/pulse 115VAC YE

|                               |                               |
|-------------------------------|-------------------------------|
| Volume/dB(max) at 1m distance | 92,0 dB dB(A)                 |
| Acoustic signal image         | Continuous tone<br>Pulse tone |
| Audio frequency               | 2300 Hz                       |

## DRAWING

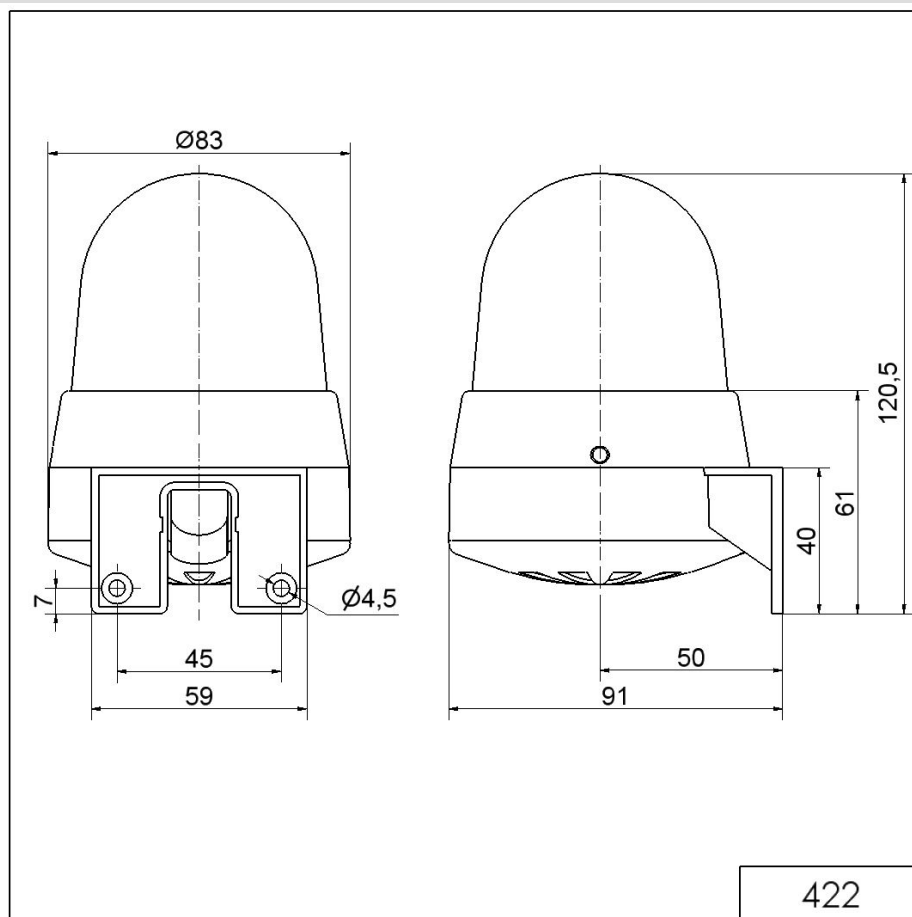

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.