

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 42VAC RD

Part No.: 580.152.66




MECHANICAL DATA	
Length	77 mm
Width	70 mm
Height	251 mm
Diameter	70 mm
Materials	PC PC/ABS
Dome colour	Red
Housing colour	Grey
Protection category	IP33
Connection	Screw terminals
cross-sectional area maximum	2,50mm ² / 14AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Wall mounting
Service life optical	Lamp: depends on bulb
Acoustic service life	300 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	309 g
Product weight	255 g
ELECTRICAL DATA	
Operating voltage	42V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	42 VAC
Protection class	Protection class 3
Pollution degree	2
OPTICAL DATA	
Light colour	Red
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	92,0 dB dB(A)
Acoustic signal image	Continuous tone
Audio frequency	600 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 42VAC RD

DRAWING

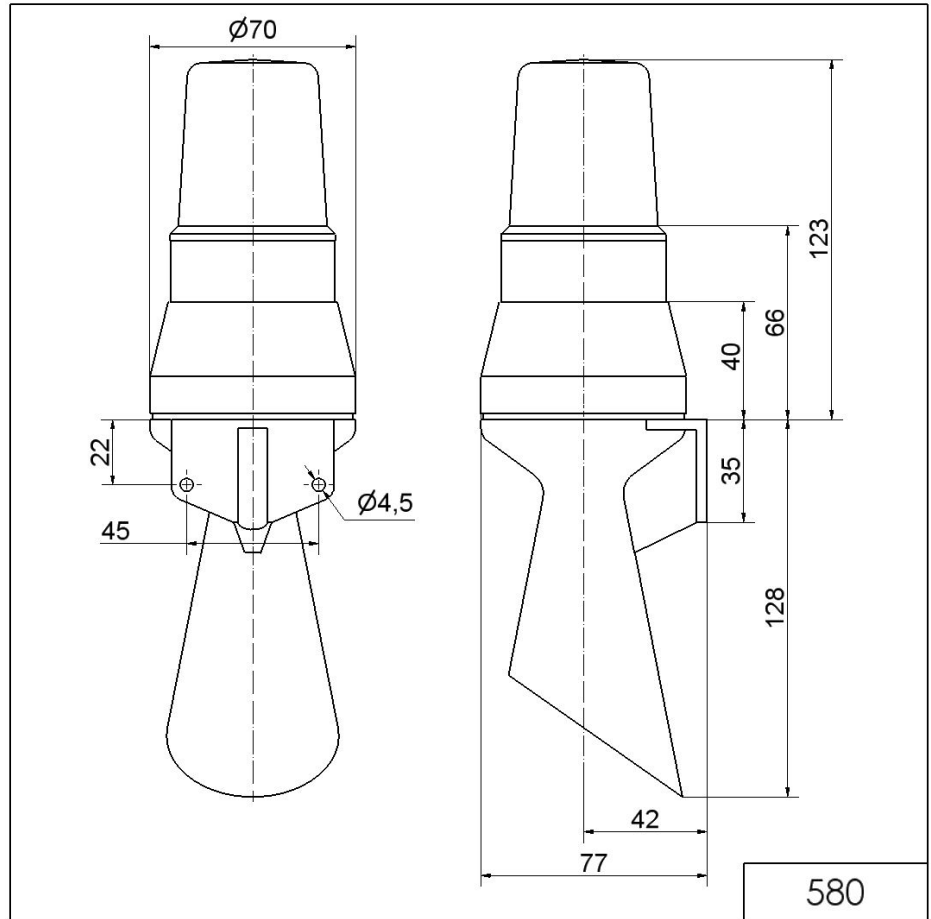

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.