## Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 12VAC/DC GN/RD



i

Part No.	699.220.74	
Series:	Kompakt 37	
MECHAN	IICAL DATA	
Height		141 mm
Diameter		38 mm
Materials		PC
Dome colour		Green
		Red
Housing colour		Black
Protection category		IP65
Connection		M12 plug 5-pole
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		150 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		n -20°C
Working temperature maximum		m +50°C
Weight with packaging		90 g
Product weight		90 g
ELECTRIC	CAL DATA	
Operating voltage		12V
Operating voltage type		AC/DC
Operatir	ng voltage frequency	50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		12 VDC
Rated operational current		195 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red
Optical signal image		Permanent
	fe optical	50,000 h maximum
ACUSTIC	AL DATA	
	(max) at 1m distance	80,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i




## Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 12VAC/DC GN/RD

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 12VAC/DC GN/RD

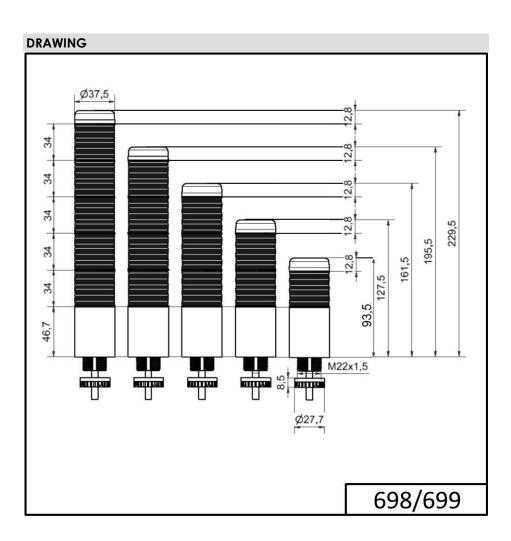

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.