## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 12VAC/DC YE



i

Part No.:	699.330.74		
Series:	Kompakt 37		
MECHANICAL DATA			
Height		141 mm	
Diameter		38 mm	
Materials		PC	
Dome colour		Clear	
Housing colour		Black	
Protection category		IP65	
Connection		Cable	
cross-sectional area maximum		0,34mm² / 22AWG	
Cable entry		Membrane grommet	
Cable entry minimum		d = 1 mm	
Cable en	try maximum	d = 9 mm	
Cable length		2000 mm	
Tension re	elief	Pull-out protection	
Type of fixing		Built-in mounting	
Working t	emperature minimum	-20°C	
Working temperature maximum		n +50°C	
Weight with packaging		90 g	
Product weight		90 g	
ELECTRICAL DATA			
Operating voltage		12V	
Operating	g voltage type	AC/DC	
Operating voltage frequency		50Hz	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		12 VDC	
Rated operational current		225 mA	
Rated inrush current		500 mA	
Protection class		Protection class 2	
Pollution degree		3 In the connection area: 2	
OPTICAL	DATA		
Light sour	се	LED	
Light colour		Red Yellow	
Optical signal image		Permanent	
Service life optical		50,000 h maximum	
ACUSTICAL DATA			
Volume (max) at 1m distance		80,0 dB (A)	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i




## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 12VAC/DC YE

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 12VAC/DC YE

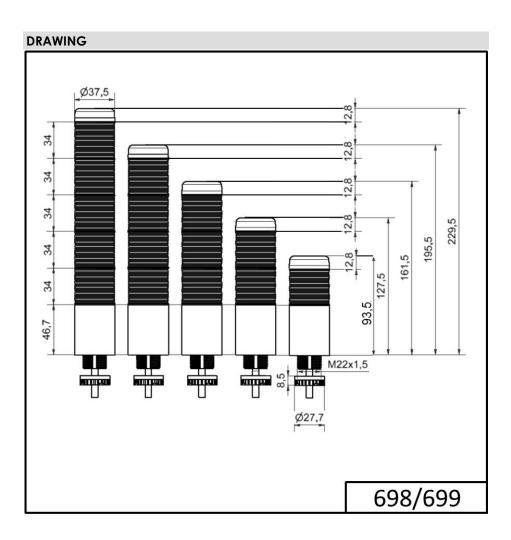

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.