Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren WH



ļ

	657.800.55		
Series:	eSIGN	L H	
MECHANICAL DATA			
Height		372 mm	
Diameter		72 mm	
Materials		PC	
Dome colour		Tranclucent	
Housing colour		White	
Protection category		IP66 IP69K	
Connection		M12 plug 8-pole	
Type of fixing		Base mounting Tube mounting	
Working temperature minimum		-30°C	
Working temperature maximum		+60°C	
Weight with packaging		849 g	
Product weight		792 g	
IK-Code (IEC 62262)		IK08	
ELECTRICAL DATA			
Operating voltage		24V	
Operating voltage type		DC	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		24 VDC	
Rated operational current		620 mA	
Rated inrush current		800 mA	
Protection class		Protection class 3	
Pollution degree		3	
Overvoltage category		I	
Isolation voltage		Ui = 50V / Uimp = 330V	
Request to external PSU		SELV/PELV	
connectivity		Digital entrance USB	
OPTICAL DATA			
Light source		LED	
Light colour		MC >1.000.000 colours	
Optical signal image		Blink Double flash Flash Permanent	
Blink frequency		Configurable	

50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Service life optical

Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren WH

105 dB
Multi-tone
10 tone
5,000 h minimum
Yes
Yes
Yes
No
No
No
cULus
Type 4/4X/12/13
No
No
No
Yes (WERMA (UK) Ltd.)
No
31

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren WH

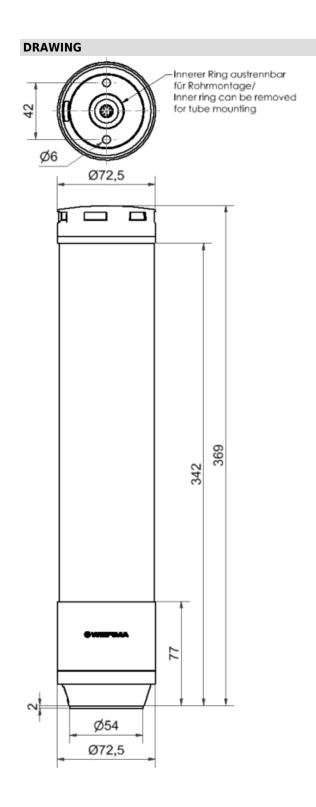

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.