

KombiSIGN 71 / Audible Devices 645

Siren self-adjusting Pulse tone 24VDC BK



Part No.:	645.810.55
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	110 mm
Diameter	70 mm
Materials	PC PC/ABS
Housing colour	Black
Protection category	IP65
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	150 g
Product weight	121 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	70 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Audible Devices 645

Siren self-adjusting Pulse tone 24VDC BK

DRAWING

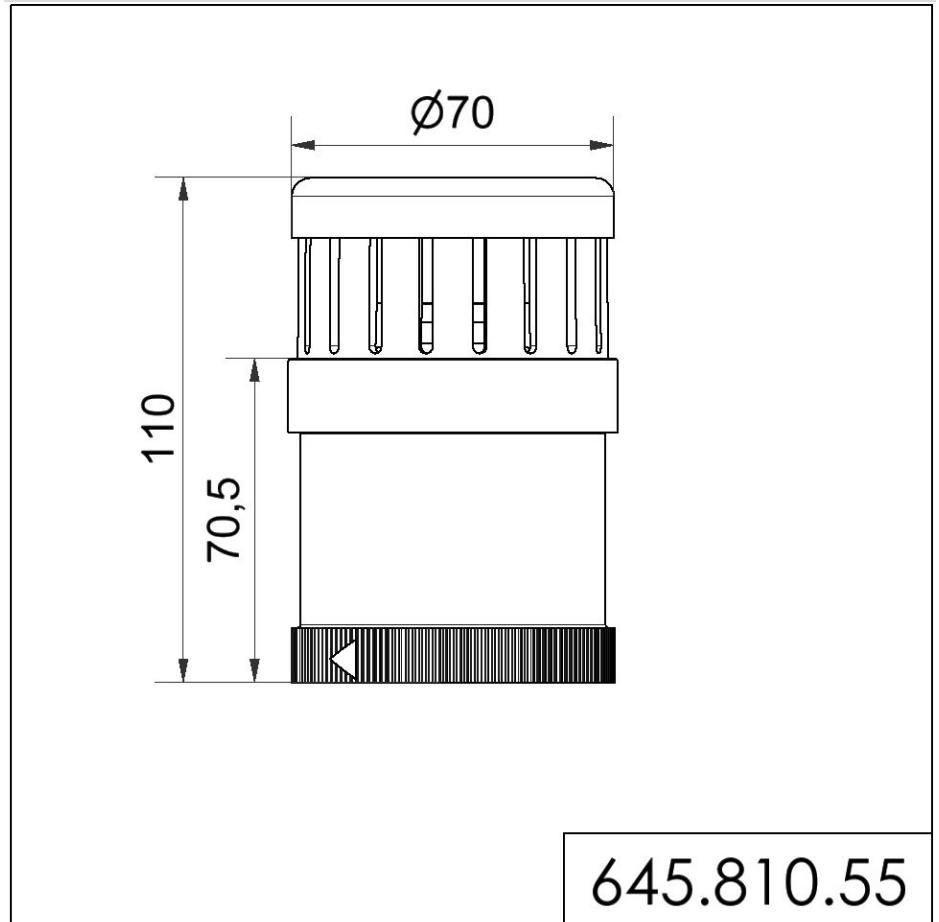

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.