

KombiSIGN 71 / Audible Devices 645

Vocal element 24VDC BK



| | |
|-----------|--------------|
| Part No.: | 645.840.55 |
| Series: | KombiSIGN 71 |



| MECHANICAL DATA | |
|-----------------------------|-----------------|
| Height | 110 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP65 |
| Service life optical | 5,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 290 g |
| Product weight | 184 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 400 mA |
| Rated inrush current | <1A |
| Protection class | Protection class 2 |
| Pollution degree | 2 |

| ACUSTICAL DATA | |
|-------------------------------|---------------|
| Volume/dB(max) at 1m distance | 88,0 dB dB(A) |
| Volume adjustable | Potentiometer |
| Volume adjustment range | 10-100% |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Audible Devices 645

Vocal element 24VDC BK

DRAWING

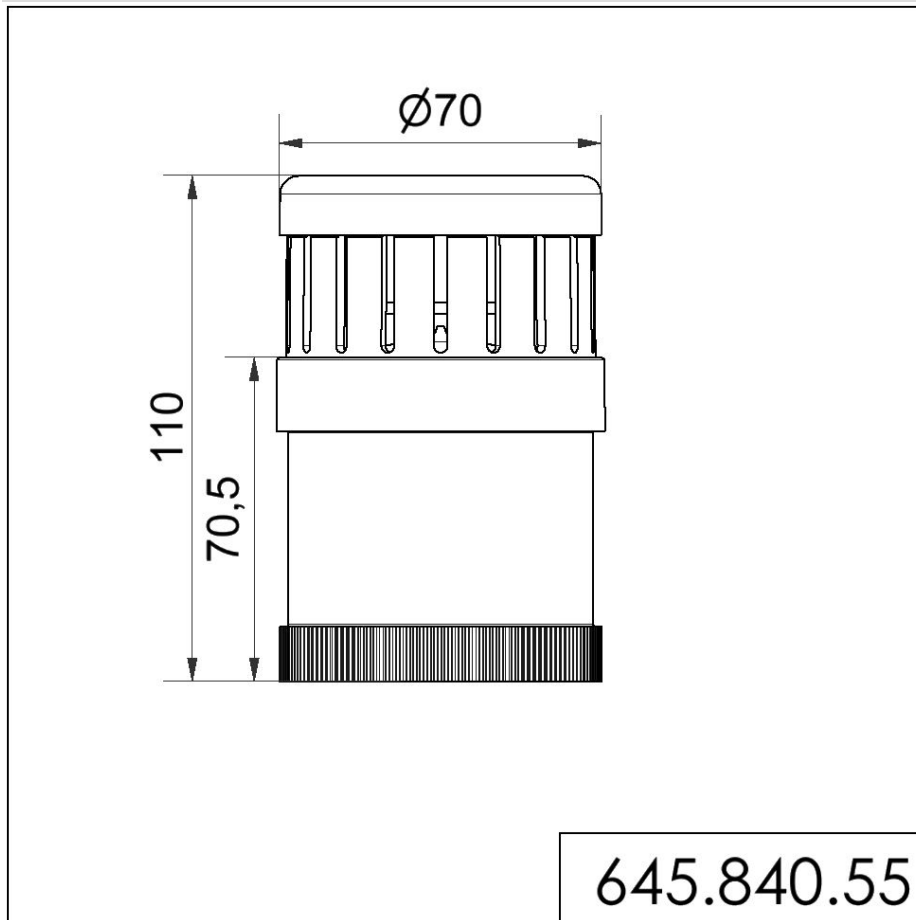

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.