

Signal tower / Pre-assembled Signal Tower

# AndonLIGHT KS71 GN/YE/RD



|           |              |
|-----------|--------------|
| Part No.: | 649.260.01   |
| Series:   | KombiSIGN 71 |

## MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 299 mm                      |
| Diameter                     | 70 mm                       |
| Materials                    | PA-GF<br>PC                 |
| Dome colour                  | Green<br>Red<br>Yellow      |
| Housing colour               | Black                       |
| Protection category          | IP30                        |
| Connection                   | Spring-type terminal        |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Through hole                |
| Cable entry maximum          | d = 11 mm                   |
| Tension relief               | Not present                 |
| Type of fixing               | Tube mounting               |
| Service life optical         | 50,000 h minimum            |
| Working temperature minimum  | 0°C                         |
| Working temperature maximum  | +40°C                       |
| Weight with packaging        | 1058 g                      |
| Product weight               | 944 g                       |

## ELECTRICAL DATA

|                             |                              |
|-----------------------------|------------------------------|
| Operating voltage           | 115-230V                     |
| Operating voltage type      | AC                           |
| Operating voltage type      | 50Hz at 230V<br>60Hz at 115V |
| Operating voltage tolerance | +/- 10%                      |
| Rated operational voltage   | 230 VAC                      |
| Rated operational current   | 40 mA                        |
| Rated inrush current        | >10A                         |
| Protection class            | Protection class 2           |
| Pollution degree            | 3                            |
| Overvoltage category        | II                           |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V     |

## OPTICAL DATA

|              |                        |
|--------------|------------------------|
| Light source | LED                    |
| Light colour | Green<br>Red<br>Yellow |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.


Signal tower / Pre-assembled Signal Tower

## AndonLIGHT KS71 GN/YE/RD

Optical signal image

Permanent

### DRAWING

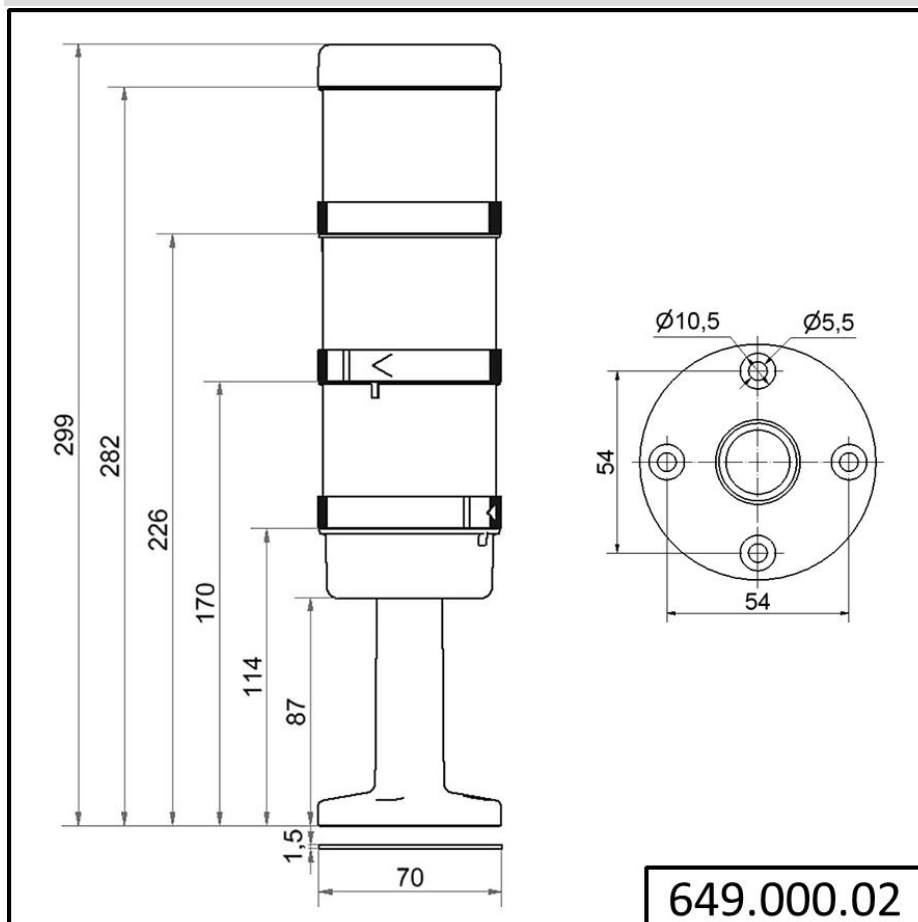

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.