

WIN transmitter KombiSIGN 70 24VAC/DC BK



Part No.: 860.840.05

**MECHANICAL DATA**

Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP54
Connection	USB
Service life optical	50,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	125 g
Product weight	100 g

ELECTRICAL DATA


Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	3



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

WIN transmitter KombiSIGN 70 24VAC/DC BK

DRAWING

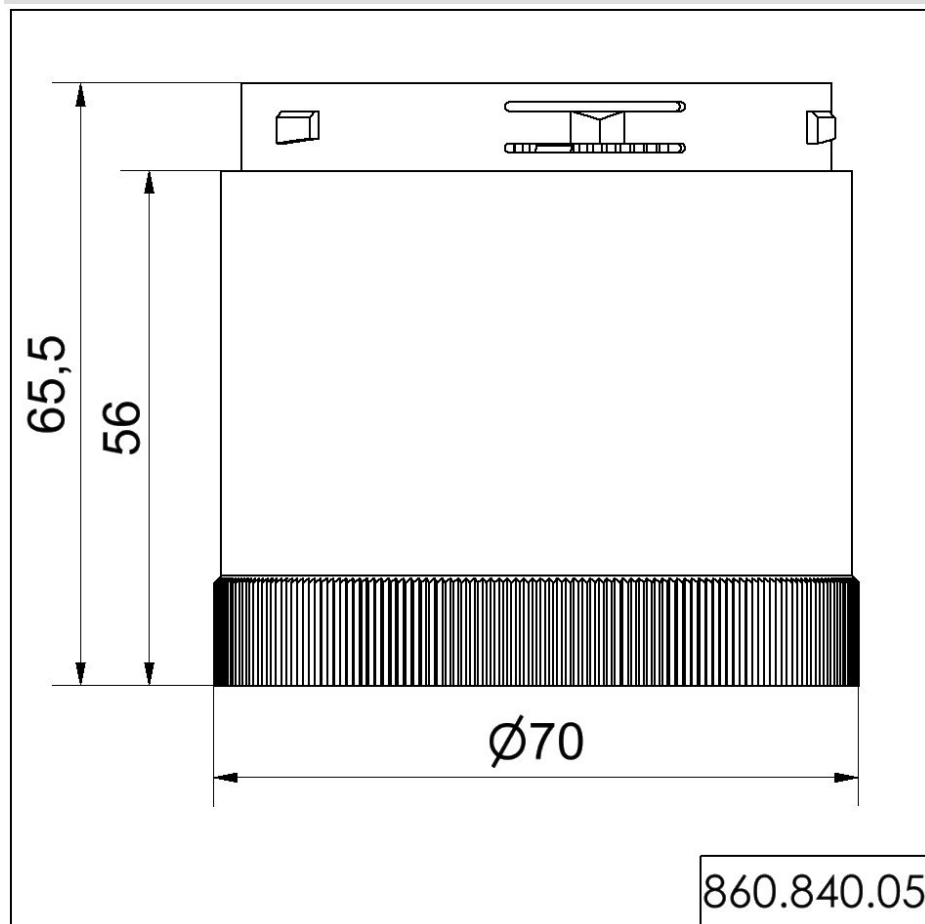

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.