CE RoHS (U)

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM 12VAC/DC GN/YE/RD

Part No.: 698.110.74



i


Series:	Kompakt 37	
MECHAN	IICAL DATA	
Height		175 mm
Diameter		38 mm
Materials		PC
Dome colour		Green Red Yellow
Housing colour		Black
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Service life optical		50,000 h maximum
Working temperature minimum		-20°C
Working temperature maximum		+50°C
UL Type Rating		Туре 12 Туре 4Х
Weight with packaging		1 g
Product weight		1 g
ELECTRIC	CAL DATA	
Operating voltage		12V
Operating voltage type		AC/DC
Operating voltage type		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		12 VDC
Rated operational current		275 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i



Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM 12VAC/DC GN/YE/RD

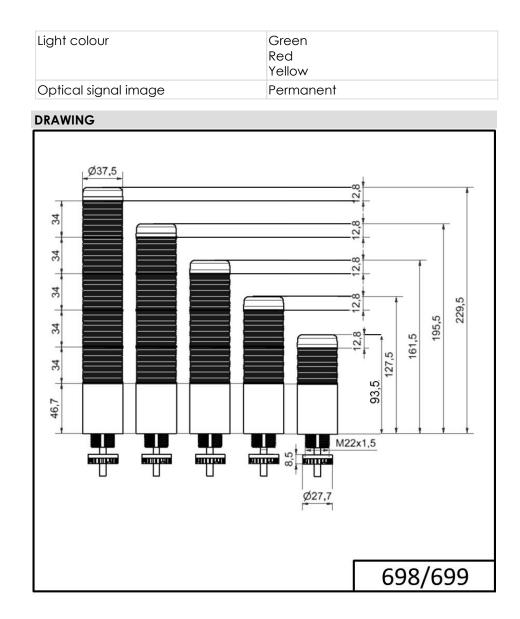

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.