

Completely pre-assembled Signal Towers / KOMPAKT 37

**K37 cable EM Pulse tone 24VAC/DC CL/GN/Y**



|           |            |
|-----------|------------|
| Part No.: | 699.140.75 |
| Series:   | Kompakt 37 |



**MECHANICAL DATA**

|                              |                                 |
|------------------------------|---------------------------------|
| Height                       | 209 mm                          |
| Diameter                     | 38 mm                           |
| Materials                    | PC                              |
| Dome colour                  | Clear<br>Green<br>Red<br>Yellow |
| Housing colour               | Black                           |
| Protection category          | IP65                            |
| Connection                   | Cable                           |
| cross-sectional area maximum | 0,34mm <sup>2</sup> / 22AWG     |
| Cable entry                  | Membrane grommet                |
| Cable entry minimum          | d = 1 mm                        |
| Cable entry maximum          | d = 9 mm                        |
| Cable length                 | 2000 mm                         |
| Tension relief               | Pull-out protection             |
| Type of fixing               | Built-in mounting               |
| Service life optical         | 50,000 h maximum                |
| Acoustic service life        | 5,000 h minimum                 |
| Working temperature minimum  | -20°C                           |
| Working temperature maximum  | +50°C                           |
| UL Type Rating               | Type 12<br>Type 4X              |
| Weight with packaging        | 240 g                           |
| Product weight               | 199 g                           |

**ELECTRICAL DATA**

|                             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 24V                            |
| Operating voltage type      | AC/DC                          |
| Operating voltage type      | 50Hz                           |
| Operating voltage tolerance | +/- 10%                        |
| Rated operational voltage   | 24 VDC                         |
| Rated operational current   | 160 mA                         |
| Rated inrush current        | 500 mA                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |

**OPTICAL DATA**

|              |     |
|--------------|-----|
| Light source | LED |
|--------------|-----|


! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37  
**K37 cable EM Pulse tone 24VAC/DC CL/GN/Y**

|                      |                                 |
|----------------------|---------------------------------|
| Light colour         | Green<br>Red<br>White<br>Yellow |
| Optical signal image | Permanent                       |

| ACUSTICAL DATA                |               |
|-------------------------------|---------------|
| Volume/dB(max) at 1m distance | 85,0 dB dB(A) |
| Acoustic signal image         | Pulse tone    |
| Audio frequency               | 2900 Hz       |

**DRAWING**

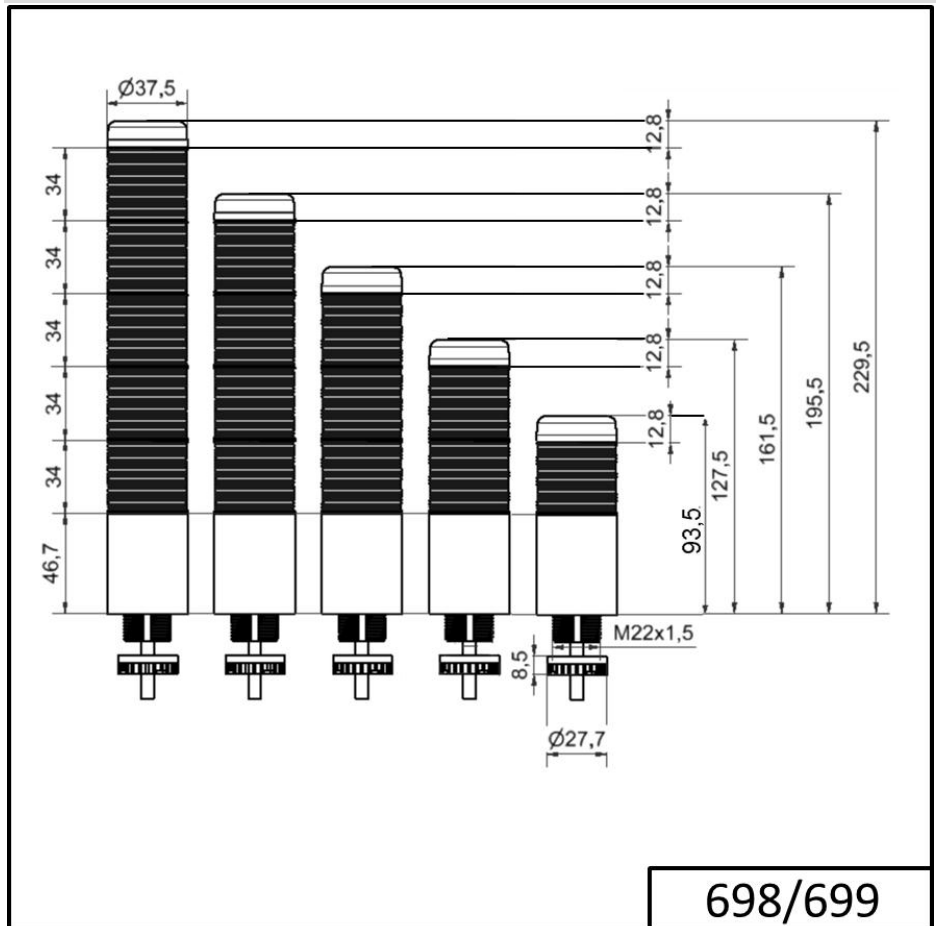

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.