

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr cable EM Pulse tone 24VAC/DC BU



Part No.:	699.360.75
Series:	Kompakt 37



MECHANICAL DATA

Height	243 mm
Diameter	38 mm
Materials	PC
Dome colour	Clear
Housing colour	Silver
Protection category	IP65
Connection	Cable
cross-sectional area maximum	0,34mm ² / 22AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Cable length	2000 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Service life optical	50,000 h maximum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12 Type 4X
Weight with packaging	260 g
Product weight	215 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	200 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3 In the connection area: 2

OPTICAL DATA

Light source	LED
--------------	-----



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37


K37cl sr cable EM Pulse tone 24VAC/DC BU

Light colour	Blue Green Red White Yellow
Optical signal image	Permanent

ACUSTICAL DATA

Volume/dB(max) at 1m distance	85,0 dB dB(A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz

DRAWING

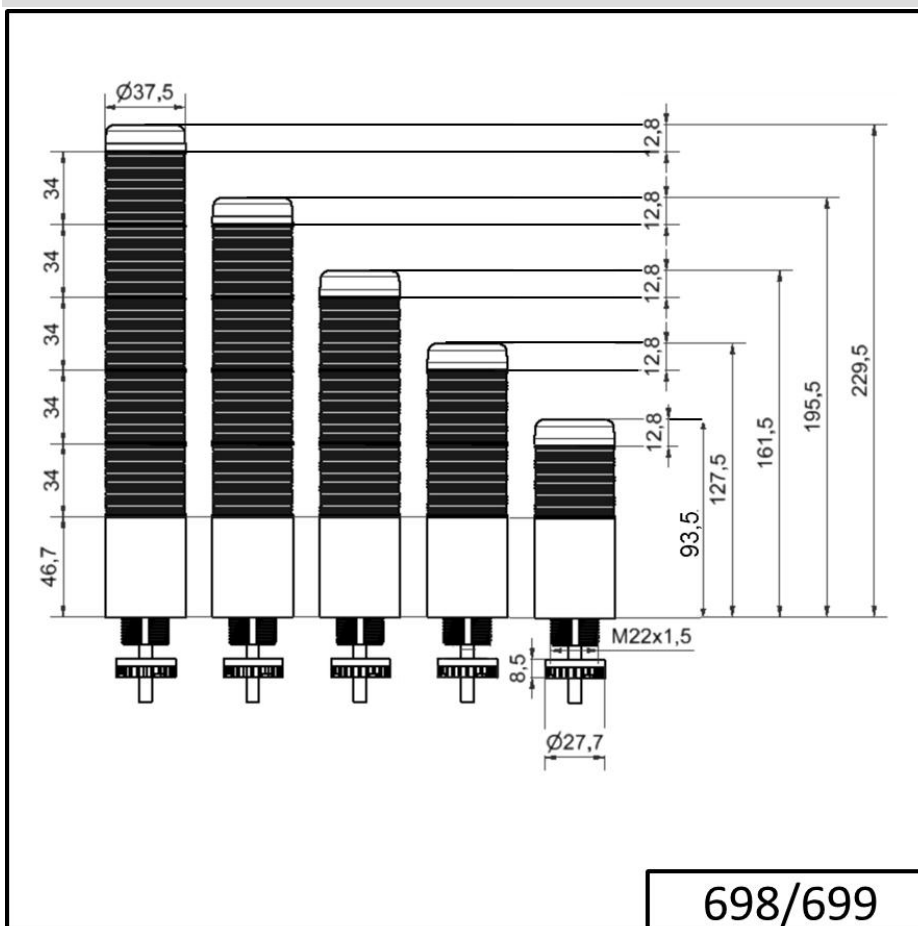

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.