

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

Electr. Buzzer EM Contin. tone 48VAC/DC



Part No.: 118.068.26 RoHS

MECHANICAL DATA	
Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	0°C
Working temperature maximum	+60°C
Weight with packaging	46 g
Product weight	46 g

ELECTRICAL DATA	
Operating voltage	48V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	48 VAC
Rated operational current	20 mA
Rated inrush current	30 mA
Protection class	Protection class 2
Pollution degree	2


ACUSTICAL DATA		
Volume/dB(max) at 1m distance	90,0 dB dB(A)	
Acoustic signal image	Continuous tone	
Audio frequency	2400 Hz	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

Electr. Buzzer EM Contin. tone 48VAC/DC

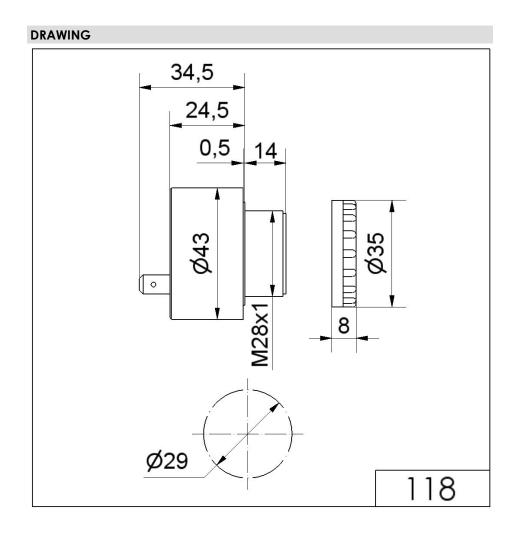

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.