

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119

Electr. Buzzer EM contin/pulse 230VAC GY

Part No.: 119.068.28

**MECHANICAL DATA**

Height	49 mm
Diameter	43 mm
Materials	PC/ABS
Housing colour	Grey
Protection category	IP30
Connection	Flat plug
Type of fixing	Built-in mounting
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	0°C
Working temperature maximum	+60°C
Weight with packaging	50 g
Product weight	50 g

ELECTRICAL DATA

Operating voltage	230V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	20 mA
Rated inrush current	<500mA
Protection class	Protection class 2
Pollution degree	2
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

ACUSTICAL DATA


Volume/dB(max) at 1m distance	90,0 dB dB(A)
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	2400 Hz



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Electronic Audible Signal Devices / Electronic Buzzers Installation 118/119
Electr. Buzzer EM contin/pulse 230VAC GY

DRAWING

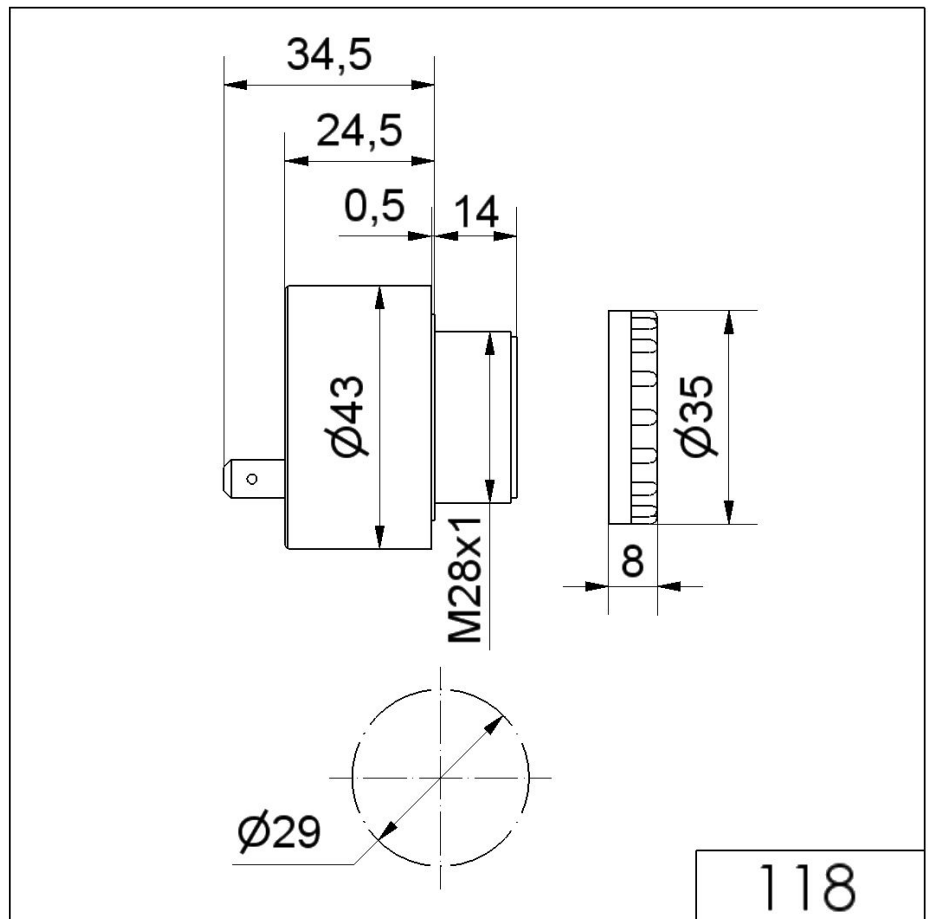

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.